NEMO

SPIGOLO FLOOR

Studiocharlie

Floor lamp based on an extruded and tubular aluminium structure, connected with moulded ABS joints, with white or black painted finish. Thanks to the joints, enabling the profiles to house LED sources one can rotate 360° in order to produce a directional direct or indirect lighting, screened by an opaline diffuser in polycarbonate. Designed as such to provide a virtual divider to ambiences. LED sources are dimmable and with warm tone.

SPIGOLO FLOOR

Studiocharlie

2 x LED

Lamping

Source	2 x LED line
Total power	20W
Emission	double, diffused
Switching	mono switch dimmable
Tension	110V / 230V
Color temperature	3000Â°K
Luminous flux	720lm + 1200lm
Typ cri	83
Energy class	A+
Materials	aluminium + polycarbonate + ABS
Typ cri	83

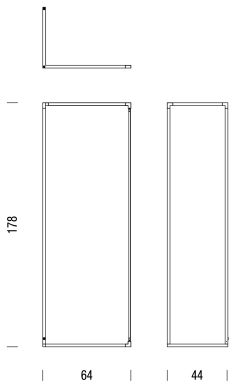

Codes

	Structure	Diffuseur
SPI LWW 21	○	
SPI LNN 21	●	

NEMO

SPIGOLO FLOOR

Studiocharlie

3 x LED

Lamping

Source	3 x LED line
Total power	60W
Emission	triple, diffused
Switching	mono switch dimmable
Tension	110V / 230V
Color temperature	3000Â°K
Luminous flux	720lm + 1200lm + 3840lm
Typ cri	83
Energy class	A+
Ip class	20
Materials	aluminium + polycarbonate + ABS
Typ cri	83

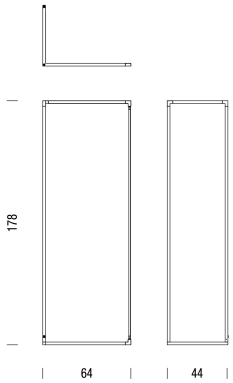

Codes

	Structure	Diffuseur
SPI LWW 22	○	
SPI LNN 22	●	