


technics		<table border="1"> <thead> <tr> <th>Name</th> <th>Reference</th> <th>Drive current</th> </tr> </thead> <tbody> <tr> <td>Down 80 single LED WW CRI83</td> <td>KR94743x-83xx</td> <td>700mA</td> </tr> <tr> <td>Down 80 single LED WW CRI90</td> <td>KR94743x-90xx</td> <td>700mA</td> </tr> <tr> <td>Down 82 single LED WW CRI98</td> <td>KR94743x-98xx</td> <td>500mA</td> </tr> <tr> <td>Down 80 single LED FIXED CRI83</td> <td>KR94703x-83xx</td> <td>700mA</td> </tr> <tr> <td>Down 80 single LED FIXED CRI90</td> <td>KR94703x-90xx</td> <td>700mA</td> </tr> <tr> <td>Down 80 single LED FIXED CRI98</td> <td>KR94703x-98xx</td> <td>500mA</td> </tr> </tbody> </table>	Name	Reference	Drive current	Down 80 single LED WW CRI83	KR94743x-83xx	700mA	Down 80 single LED WW CRI90	KR94743x-90xx	700mA	Down 82 single LED WW CRI98	KR94743x-98xx	500mA	Down 80 single LED FIXED CRI83	KR94703x-83xx	700mA	Down 80 single LED FIXED CRI90	KR94703x-90xx	700mA	Down 80 single LED FIXED CRI98	KR94703x-98xx	500mA
			Name	Reference	Drive current																		
Down 80 single LED WW CRI83	KR94743x-83xx	700mA																					
Down 80 single LED WW CRI90	KR94743x-90xx	700mA																					
Down 82 single LED WW CRI98	KR94743x-98xx	500mA																					
Down 80 single LED FIXED CRI83	KR94703x-83xx	700mA																					
Down 80 single LED FIXED CRI90	KR94703x-90xx	700mA																					
Down 80 single LED FIXED CRI98	KR94703x-98xx	500mA																					
1 dimensions	<div style="border: 1px solid black; padding: 5px;"> <p>The luminaire must not under any circumstances be covered with heat insulating covers or similar materials. Cables must not touch the luminaire housing. The connection cable must be routed so that it does not touch the lamp when the luminaire is tilted.</p> </div>																						

2 cut out	<p>Min dimension for cooling, gear exclusive (can be applied with non combustible matter, gear exclusive)</p> <p>Min dimension for cooling, gear inclusive</p>	Name	Reference	A x B	CxD	E _{min}	F _x G	H _{min}	T _{min} -T _{max}
				Down 80 WW LED	KR947x3x-xxxx	91x91	200x200	100	260x260
		Plasterboard thickness							9-26


3 installation	<p>In case of WW the reflector is on top of the louvre, in case of fixed, the reflector is added to the cooling part.</p>	<p>Bend springs to remove LED module and ring (only in case of KR94703x).</p>	<p>Fold the springs inward to insert into the ceiling.</p>	<p>Install the correct gear with strain relief on the hollow ceiling.</p>
	<p>Remove louvre with reflector by pulling at the reflector.</p>			

4 installation	<p>Put the LED assembly and ring (in case of KR94703x) in the plasterkit.</p>	<p>click !</p>
	<p>Important: always check the polarity!! + = red wire - = black wire</p>	


technics



WW

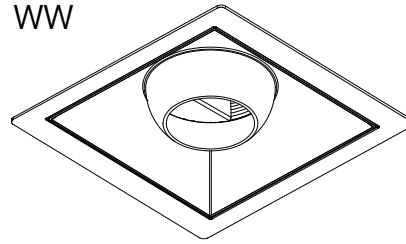

Fixed

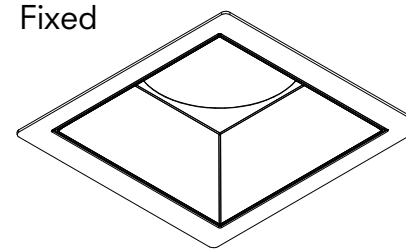


5 installation

In case of WW put the reflector on the louvre.

To install the louvre see manual KR8170001762

To install the louvre see manual KR8170001762

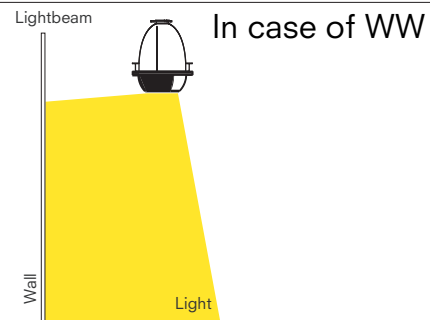

WW



Fixed

