
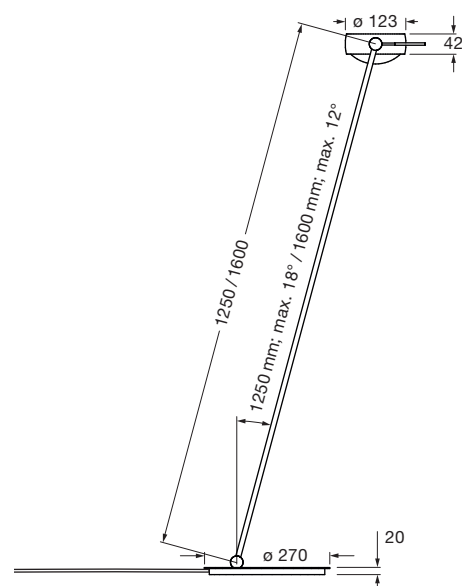


Sento lettura datasheet

LED floor luminaire, connection via power supply unit (converter) with wall plug. Modular LED head-body-system allows free combination of different surfaces of head, body and base. Removable head for configuration and maintenance purposes, LED changeable. Heads available with one sided or double sided light output, power of light source 18W.

Lighting effect changeable by using optional inserts, dichroic color filters can be added. Adjustment via heat-decoupled carbon pin (fixation of head against rotation optional). Switch- and dimmable via »touchless control« with gestures at the head.

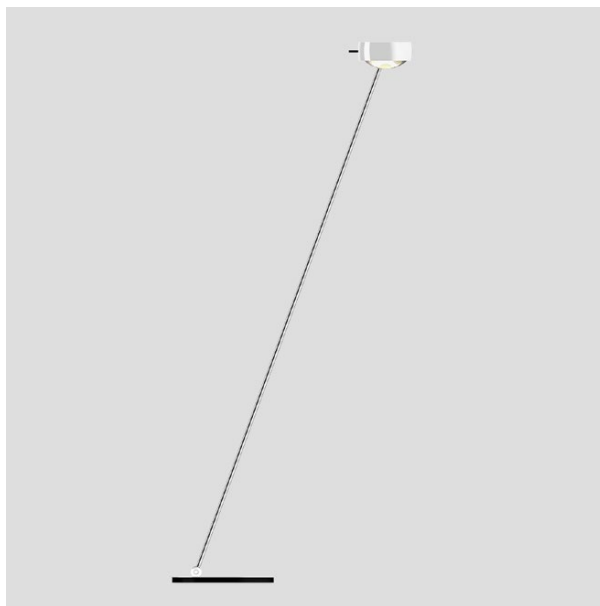

dimensions in mm



technical data Sento lettura

properties	material	aluminium, steel chrome-plated, painted or anodised, plastic, glass, optical plastic	
	length	1250 / 1600 mm	
	rotation head	360°	
	swivel range	1250 mm; max. 18° / 1600 mm; max. 12°	
	weight	8.5 kg	
surface	head	matt gold, rose gold, bronze, shiny chrome, matt chrome, glossy white, matt white, matt black, phantom, black phantom	
	body	matt white, matt black, shiny chrome, matt chrome	
	base	shiny chrome, glossy white, matt chrome, matt white, matt black	
	cable	matt white, matt black, transparent	
Occhio LED	average life time	> 50.000 hrs	
	energy efficiency class	G	
	power	18 W	
	color rendering index	perfect color; CRI Ra 97	high flux; CRI Ra 85
	color temperature	2700, 3000 K	3000, 3500, 4000 K
recommended use	residential and public	public	
electricity	dimming	»touchless control« and Occhio air (optional)	
	power supply plug unit	with integrated converter, cable length 180 cm, for use with 230 V AC	
	permitted operating conditions	max. 30°C for indoor use only	



Sento lettura lighting effects

 head single sided

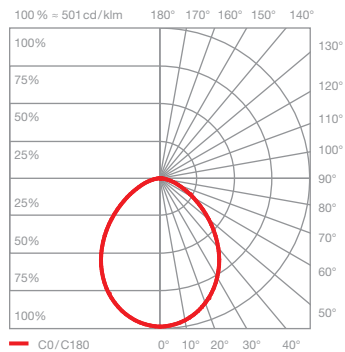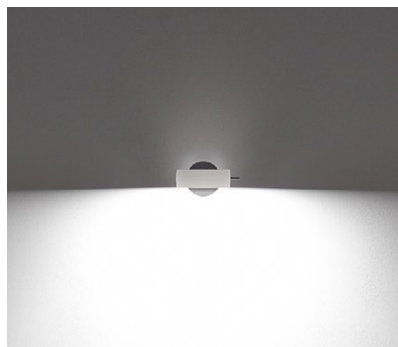


Sento B

diffuse light

insert: diffusor glass

luminous flux: perfect color 18 W 1000lm
high flux 18 W 1370lm


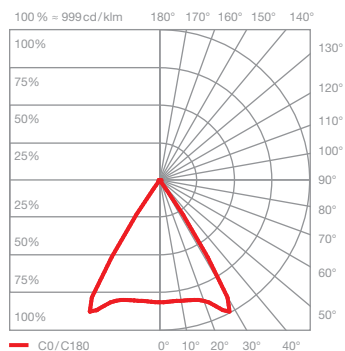


Sento C

directed light
beam angle approx. 80°

insert: lens

luminous flux: perfect color 18 W 1140lm
high flux 18 W 1570lm

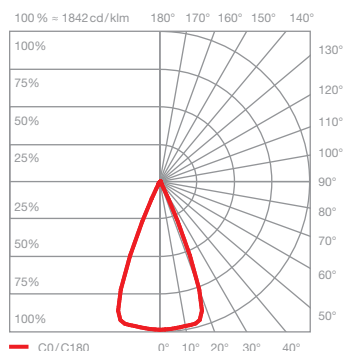
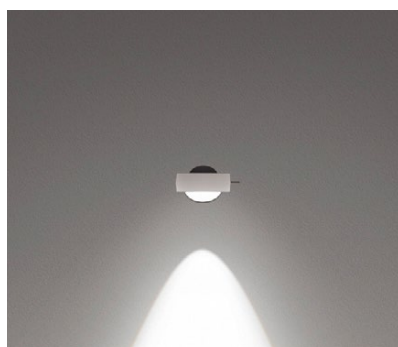


Sento S40

directed light
beam angle approx. 40°

insert: spot lens, lens
soft edge glass

luminous flux: perfect color 18 W 1130lm
high flux 18 W 1560lm

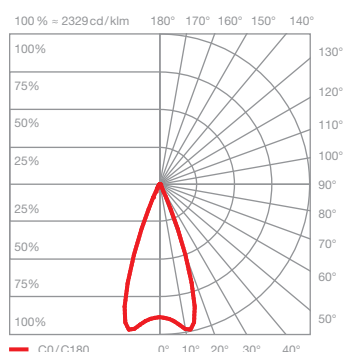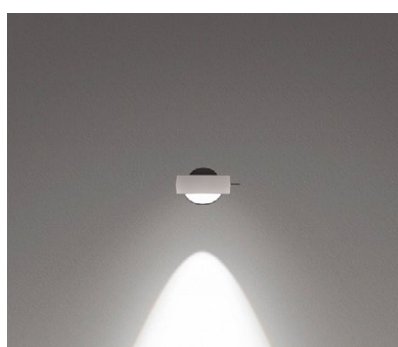

Sento S30



directed light
beam angle approx. 30°

insert: spot lens, lens
fresnel lens

luminous flux: perfect color 18 W 1110lm
high flux 18 W 1530lm

Sento lettura lighting effects

 head double sided

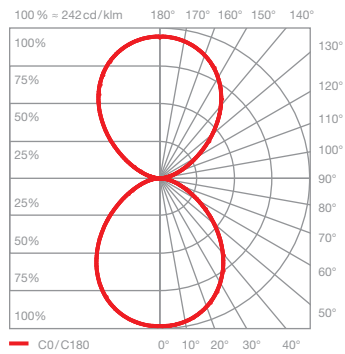
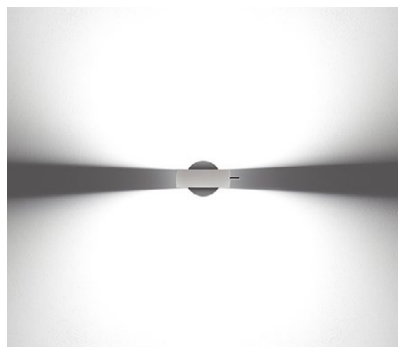


Sento A

diffuse light in both directions

insert: diffuser glass
diffuser glass

luminous flux: perfect color 18 W 1090lm
high flux 18 W 1500lm

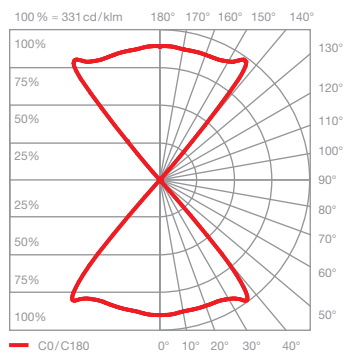
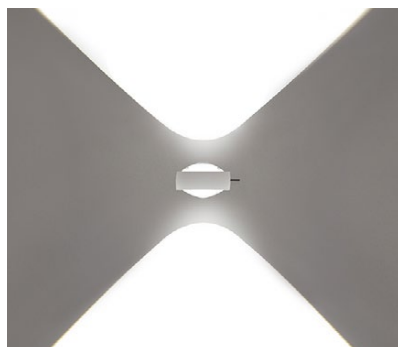


Sento D

directed light in both directions
beam angle approx. 80°

insert: lens
lens

luminous flux: perfect color 18 W 1270lm
high flux 18 W 1750lm

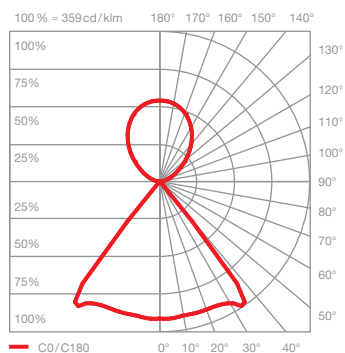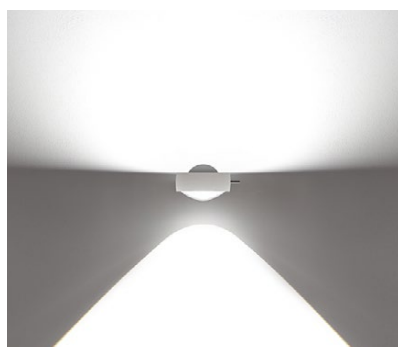

Sento E

diffuse up light
directed down light
beam angle approx. 80°

insert: diffuser glass
lens

luminous flux: perfect color 18 W 1170lm
high flux 18 W 1620lm