

## Sento sospeso due datasheet


LED system-suspended luminaire with double sided light output, luminous power 32 W per head (version with chrome finish 26 W per head). Ratio of up and down light adjustable. Lighting effect changeable via optional inserts.

due-version with height adjustment

LED suspended luminaire freely height adjustable incl. power supply unit (converter) integrated in ceiling canopy, mounting on fixed ceiling, connection to 230 V. Remote dimmable via trailing edge phase-cut dimmer or with synchronous gestures »touchless fading« on the head.

due-version with fixed length

LED suspended luminaire with a fixed adjustable height incl. power supply unit (converter) integrated in ceiling canopy, mounting on fixed ceiling, connection to 230 V. Remote dimmable via trailing edge phase-cut dimmer or with synchronous gestures »touchless fading« on the head.

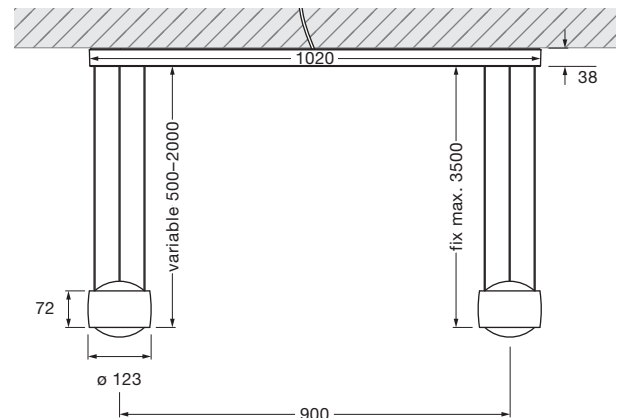

canopy width: 120

dimensions in mm


### technical data Sento sospeso due

properties	material	aluminium, steel chrome-plated, painted or anodised, plastic, glass, optical plastic		
	freely height adjustable	only variable version		
	length	variable: 500 – 2000 mm / fix: max. 3500 mm		
	weight	variable: 10.2 kg / fix: 10.7 kg		
surface	head	shiny chrome, matt chrome, glossy white, matt white, matt black, matt gold		
	canopy	matt white		
Occhio LED	average life time	> 50.000 hrs		
	energy efficiency class	A+ / A		
	power	2 x 32 W / 2 x 26 W*		
	color rendering index	perfect color; CRI Ra 97	high flux; CRI Ra 85	
	color temperature	2700, 3000 K	3000, 3500, 4000 K	
	recommended use	residential and public	public	
electricity	dimming	»touchless control« and Occhio air (optional) or via trailing-edge phasecut dimmer**		
	power supply unit	integrated, for use with 230 V AC		
	permitted operating conditions	max. 30°C for indoor use only		

\* version chrome \*\* For a list of compatible dimmers, see [www.occhio.de/dim\\_en](http://www.occhio.de/dim_en), trailing-edge phasecut dimmer and Occhio air not combinable




## Sento sospeso due lighting effects

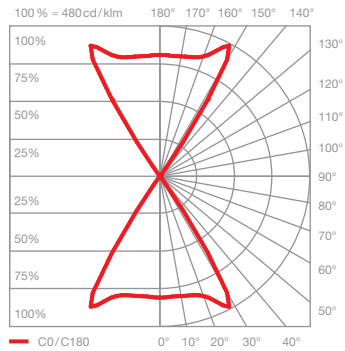

**Sento D**  
directed light in both directions beam angle approx. 80°

inserts: lens  
lens

luminous flux:	perfect color	2 x 32 W	2070 lm
	high flux	2 x 32 W	2920 lm
	perfect color	2 x 26 W	1690 lm
	high flux	2 x 26 W	2300 lm

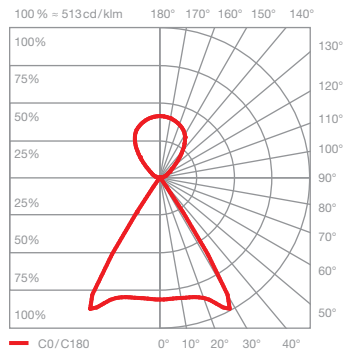

**Sento E**  
diffuse up light directed down light beam angle approx. 80°

inserts: satinised glass  
lens

luminous flux:	perfect color	2 x 32 W	1940 lm
	high flux	2 x 32 W	2730 lm
	perfect color	2 x 26 W	1580 lm
	high flux	2 x 26 W	2150 lm