



WEVER & DUCRÉ
LIGHTING

BOX WALL mini 2.0

301120W0

ALGEMEEN

Wand
Opbouw
Signaalwit
IP20
Interieur
Indirect 420^a tot 425^b lm
Direct 420^a tot 425^b lm
Total 840^a tot 850^b lm
RAL 9003^c

LED

Lamp 2 x PARI6
PARI6
Socket GU10
max. 12 W
CRI \geq 80

FYSISCH

Lengte 67 mm
Width 67 mm
Height 200 mm
0.44 kg

ELEKTRISCH

100 - 240 V
Totaal aangesloten vermogen 13.2^b tot 13.3^a W
Klasse 1
Veiligheidsafstand 0.3 m

^a LED 3000K CRI 80 wit

^b LED 2700K CRI 80 wit

^c Color may deviate slightly due to production conditions.


Project

Type


Notities

Kwantiteit


Datum

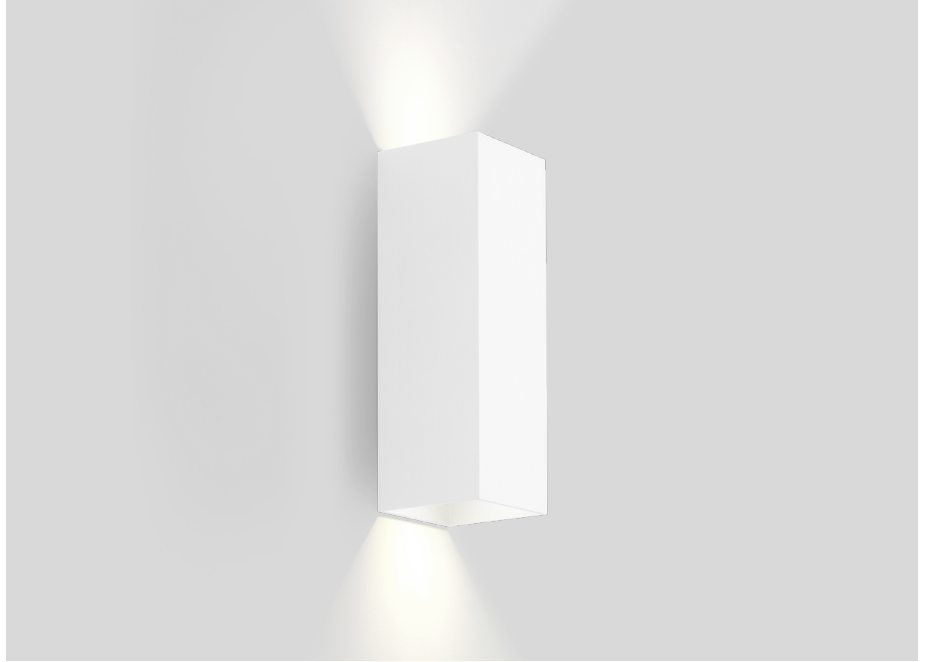

Vierkanten armatuur voor wandopbouw van aluminium; oppervlak Signaalwit; gepoedercoat; mat textuur; RAL 9003; directe/indirecte lichtverdeling; lampfitting GU10; lamptype PARI6; 2x max. 12W; 100 - 240 V; lamp niet inbegrepen; beschermingsgraad IP20; PC1;



LICHTVERDELING

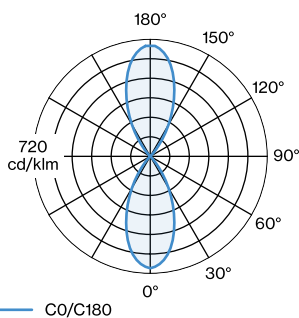



WEVER & DUCRÉ
LIGHTING

BOX WALL mini 2.0

301120W0

ARMATUREN

PAR16 LED lamp

TYPE	KLEUR	Ø·H (MM)	ORDERCODE
2700K >90 CRI GU10	Zwart	ø50·58	9 0 1 2 2 8 B 3
3000K >90 CRI GU10	Zwart	ø50·58	9 0 1 2 2 8 B 5
2700K >90 CRI GU10	Wit	ø50·58	9 0 1 2 2 8 W 3
3000K >90 CRI GU10	Wit	ø50·58	9 0 1 2 2 8 W 5
2700K >80 CRI GU10	Zilver	ø50·52	9 0 5 2 2 7 S 2
3000K >80 CRI GU10	Zilver	ø50·52	9 0 5 2 2 7 S 4