


acrobat

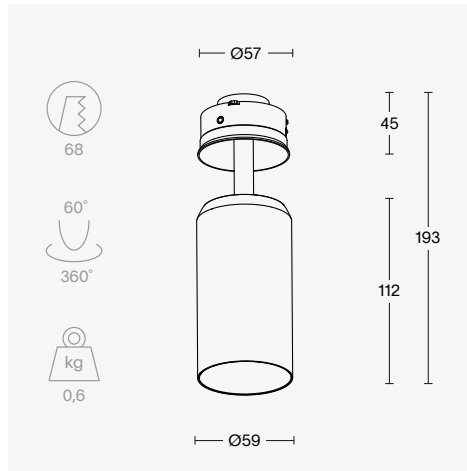

light specs

lamp	LED
reflector	glass lens
driver	excluded
IP	44
CRI	90+
class	III

luminaire output

	2700K			3000K		
	15°	25°	40°	15°	25°	40°
350mA (5.7W)	290 lm	420 lm	585 lm	325 lm	460 lm	645 lm
500mA (8.5W)	450 lm	555 lm	730 lm	495 lm	610 lm	805 lm
700mA (12.8W)	505 lm	720 lm	955 lm	560 lm	795 lm	1055 lm
850mA (16.8W)	570 lm	815 lm	1075 lm	630 lm	900 lm	1180 lm

order number

	2700K			3000K		
	15°	25°	40°	15°	25°	40°
black ano.	8000 - 1087	8000 - 1088	8000 - 1089	8000 - 1090	8000 - 1091	8000 - 1092
white struc.	8000 - 1093	8000 - 1094	8000 - 1095	8000 - 1096	8000 - 1097	8000 - 1098

acrobat

accessories

installation

8000 - 0003	plaster ring Ø57
-------------	------------------

drivers

8000 - 0021	DALI dimmable driver 38W
-------------	--------------------------

8000 - 0022	1-10V dimmable driver 36W
-------------	---------------------------

8000 - 0023	non-dimmable driver 42W
-------------	-------------------------

8000 - 0026	DALI dimmable driver 60W
-------------	--------------------------

8000 - 0027	DALI deep dim driver 20W
-------------	--------------------------