
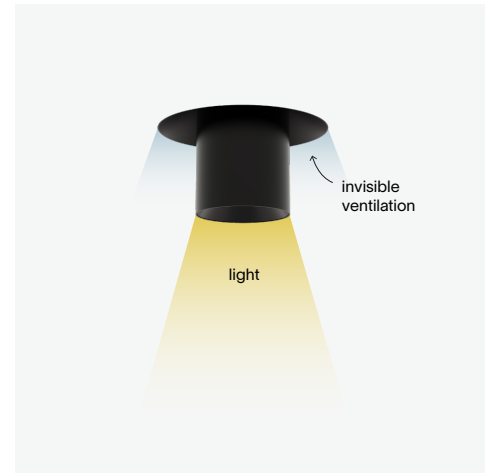


light + ventilation short

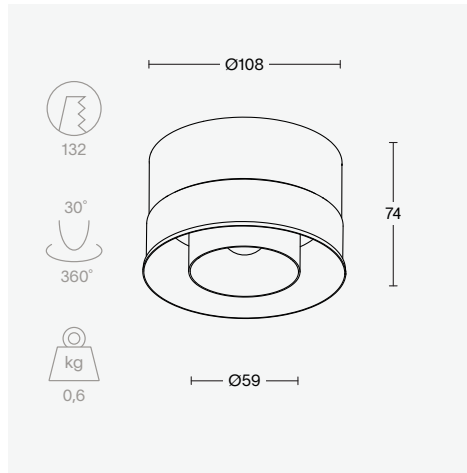

light specs

lamp	LED
reflector	glass lens
driver	excluded
IP	44
CRI	90+
class	III

ventilation specs

type	air extraction
air flow	max. 50m ³ /h
pressure	7 - 75 Pa
noise level	< 25 dB(A)
adjustment	32 steps
lock mechanism	integrated

luminaire output

	2700K	3000K
	25°	25°
350mA (5.7W)	420 lm	460 lm
500mA (8.5W)	555 lm	610 lm


order number

	2700K	3000K
	25°	25°
black ano.	8000 - 1013	8000 - 1014
white struc.	8000 - 1015	8000 - 1016


light + ventilation short

ventilation - capacity graphs

air extraction

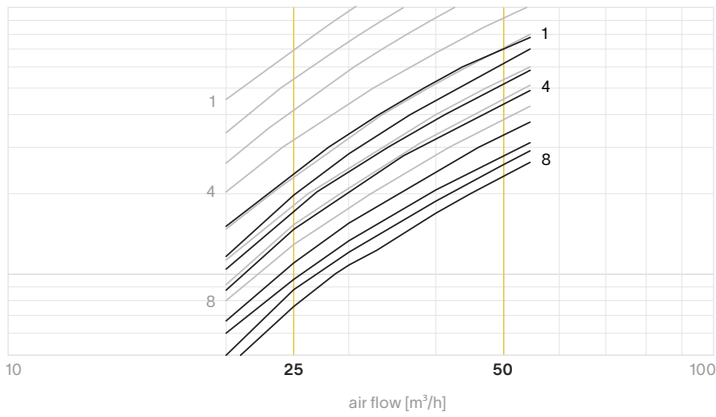

air supply*

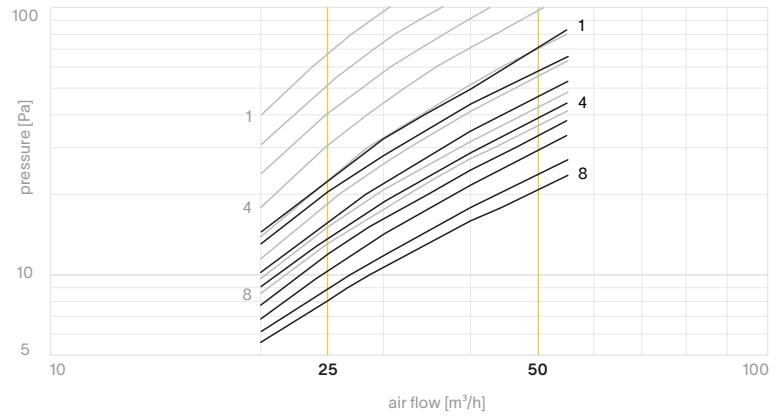

— with 25m³/h ring

— without 25m³/h ring

*downward airflow not suited for installation in or above comfort zones

accessoires

installation

8000 - 0001

plaster ring Ø108

drivers

8000 - 0021

DALI dimmable driver 38W

8000 - 0022

1-10V dimmable driver 36W

8000 - 0023

non-dimmable driver 42W

8000 - 0026

DALI dimmable driver 60W

8000 - 0027

DALI deep dim driver 20W