


## trimless spot adjustable

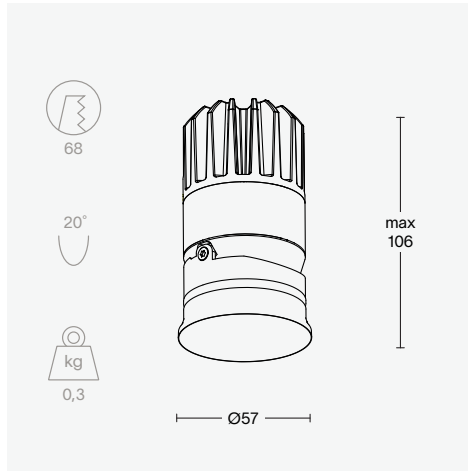

## light specs

<b>lamp</b>	LED
<b>reflector</b>	glass lens
<b>driver</b>	excluded
<b>IP</b>	44
<b>CRI</b>	90+
<b>class</b>	III

## accessories

## installation

<b>8000 - 0003</b>	plaster ring Ø57
--------------------	------------------

## drivers

<b>8000 - 0021</b>	DALI dimmable driver 38W
<b>8000 - 0022</b>	0-10V dimmable driver 36W
<b>8000 - 0023</b>	non-dimmable driver 42W
<b>8000 - 0026</b>	DALI dimmable driver 60W
<b>8000 - 0027</b>	DALI deep dim driver 20W

## luminaire output

	2700K			3000K		
	15°	25°	40°	15°	25°	40°
<b>350mA (5.7W)</b>	290 lm	420 lm	585 lm	325 lm	460 lm	645 lm
<b>500mA (8.5W)</b>	450 lm	555 lm	730 lm	495 lm	610 lm	805 lm
<b>700mA (12.8W)</b>	505 lm	720 lm	955 lm	560 lm	795 lm	1055 lm
<b>850mA (16.8W)</b>	570 lm	815 lm	1075 lm	630 lm	900 lm	1180 lm

## order number

	2700K			3000K		
	15°	25°	40°	15°	25°	40°
<b>black ano.</b>	8000 - 1111	8000 - 1112	8000 - 1113	8000 - 1114	8000 - 1115	8000 - 1116
<b>white struc.</b>	8000 - 1117	8000 - 1118	8000 - 1119	8000 - 1120	8000 - 1121	8000 - 1122