

FUNNEL

Design by .

VIBIA

Reference

2012.

Application

Ceiling Lamps

Installation type

Surface

Description

Light for ceiling or wall fitting. Gives an indirect light which is ideal for creating a cosy atmosphere in any room. Non-dazzle. Available in two finishes: matt white lacquer or matt gold leaf.

Diffuser

Aluminium diffuser


Materials

Shade: Aluminum
Reflector: Aluminum
Wall plate: Steel

Finish

-  **2012-10** White (NCS S 0300-N)
-  **2012-36** Soft Pink (NCS S 1010-Y50R)
-  **2012-47** Green L1 (NCS S 4005-G80Y)
-  **2012-51** Matt gold leaf (Gold)

Sketch



Light source: 2700K CRI >80 632 lm 100 lm/W

Fixture: 420 lm 67 lm/W

Driver included: CC - Constant Current 350 mA 100-240V 50/60Hz

Electronic dimming NO DIMMING

Physical characteristics

1 Box / 0.17 x 0.27 x 0.27 m. / Vol. 0.0115 m³ /
Gross weight 1.3 kg. / Net weight 1.2 kg.


Installation and assembly

Please, see the installation manual


Light distribution

Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



Photometric data

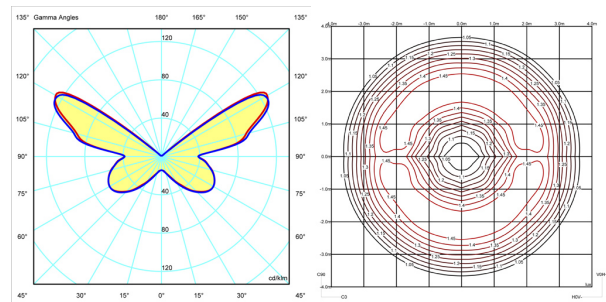

Certificates



Electrical characteristics

1 x LED PLATE 6,3W 350mA

Total 6,3 W

