

PIN

Design by Ichiro Iwasaki.

Reference

1660.

Application

Floor Lamps

Installation type

Surface

Description

Floor lamp. Design by Ichiro Iwasaki. This reading lamp is characterized by having a diffuser with an adjustable head. Available in white, black, cream and green matt finishes.

Diffuser

Polycarbonate diffuser

Materials

Head: Aluminium

Base: Zamak

Diffuser: Polycarbonate

Rods: Steel

Finish



1660-04 Black (NCS 9000N)



1660-58 Cream (NCS S 2005-Y20R)




1660-62 Green (NCS S 3010-G20Y)



1660-93 White (NCS S 0502-Y)

Sketch



Electrical characteristics

1 x LED 4,5W 350mA

Total 4.5 W



VIBIA



Light source: 2700K CRI >80 450 lm 109 lm/W

Fixture: 208 lm 0 lm/W

Driver included: CC - Constant Current 350 mA 100-240V 50/60Hz

Electronic dimming NO DIM

Technical characteristics

- Switch on the cable

Physical characteristics

1 Box / 1.50 x 0.27 x 0.33 m. / Vol. 0.1308 m³ /

Gross weight 7.5 kg. / Net weight 3.8 kg.


Installation and assembly

Please, see the installation manual

Light distribution

Reading

Lamp having a light beam whose main function is to supply sufficient light for reading.



Photometric data

Efficiency : 46.31%

Coordinate system : CG

Total flux : 449.94

Maximum value : 193.70

Light position : C=75.00 G=5.00


Symmetry on the planes : Symmetrical planes

270-90

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=1.25m

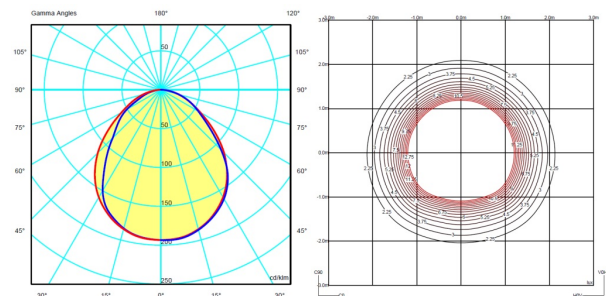

Certificates

