

PLUS

Design by X. Claramunt and M. de Mas.

VIBIA

Reference

0620.

Application

Ceiling Lamps

Installation type

Surface

Description

Asymmetrical ceiling light, designed by X. Claramunt and M. de Mas. Direct, diffuse and uniform light distribution. Convex methacrylate diffuser and matt white lacquer finish, though the whole fixture can be painted in the desired colour to make it blend perfectly into the ceiling. Its form recalls a real skylight. Features dimmable electronic ballast (DALI System).

Diffuser

Methacrylate diffuser

Materials

Body: Polyurethane foam

Diffuser: Methacrylate


Ceiling support: Steel

Finish



0620-03 White (RAL 9010)

Sketch




Electrical characteristics

4 x G5 230V 24W (T5)

Total 96.0 W

A

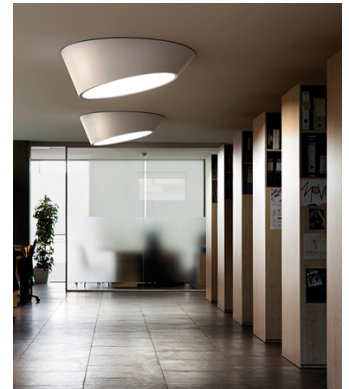

Fixture: 1971 lm 21 lm/W

Driver included: 230V 50Hz

Electronic dimming DALI Push

Technical characteristics

- Dimmable electronic ballast.
- Easy-to-install and replace bulb system

Physical characteristics

1 Box / 0.45 x 0.95 x 0.95 m. / Vol. 0.4151 m³ /

Gross weight 16.8 kg. / Net weight 15.1 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 28.16%

Coordinate system : CG

Total flux : 7000.00 lm

Maximum value : 92.16 cd/klm

Light position : C=90.00 G=10.00


Symmetry on the planes : Symmetrical planes

270-90

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

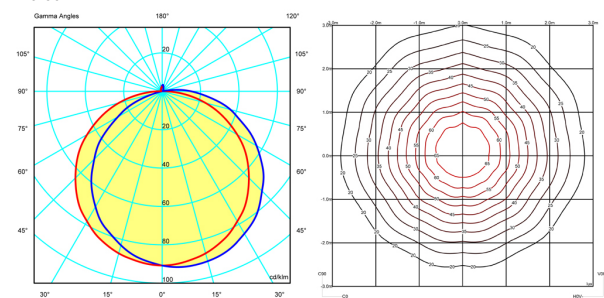

Certificates



