

PLUS

Design by X. Claramunt and M. de Mas.

Reference

0625.

Application

Ceiling Lamps

Installation type

Surface

Description

Symmetrical ceiling light, designed by X. Claramunt and M. de Mas. Direct, diffuse and uniform light distribution. Convex methacrylate diffuser and matt white lacquer finish, though the whole fixture can be painted in the desired colour to make it blend perfectly into the ceiling. Its form recalls a real skylight. Features dimmable electronic ballast (DALI & PUSH System).

Diffuser

Methacrylate diffuser

Materials

Body: Polyurethane foam

Diffuser: Methacrylate


Body: Aluminum

Finish



0625-03 White (RAL 9010)

Sketch




Electrical characteristics

4 x G5 230V 24W (T5)

Total 96.0 W

A

VIBIA

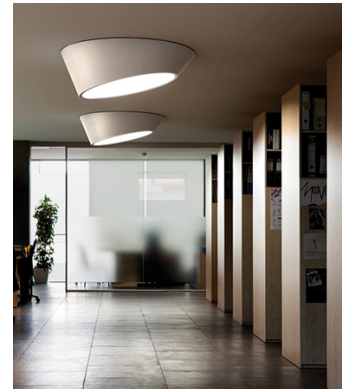

Fixture: 1971 lm 21 lm/W

Driver included: 230V 50Hz

Electronic dimming DALI Push

Technical characteristics

- Dimmable electronic ballast.
- Easy-to-install and replace bulb system

Physical characteristics

1 Box / 0.27 x 0.96 x 0.96 m. / Vol. 0.2488 m³ /

Gross weight 15.1 kg. / Net weight 13.6 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 28.62%

Coordinate system : CG

Total flux : 7000.00 lm

Maximum value : 96.08 cd/klm


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

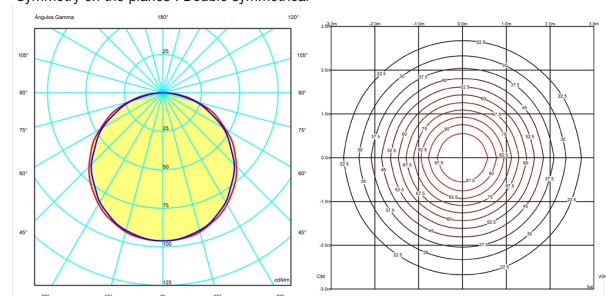

Certificates



