


lui pico up datasheet

LED ceiling or wall mounted luminaire with cylindrical head and interchangeable lenses. Version with surface mount transformer for fitting onto solid ceiling with cable outlet; power supply with internal power source (converter). Freely moveable through Occhio 3d-kinematics with two axes of rotation at an angle of 45° to each other. Removable head for maintenance purposes, replaceable LED chip.

Available with a zoom optic for beam characteristics continuously adjustable from 20° to 60° or alternatively with a lens optic with different inserts. Power 18W, dimmable via dimmable ballast on site or via slider on the back of the head. The finishes of the head, optics, arm and base are freely configurable.

Other versions: pico flat (with flat base), pico track (with track mounted converter box).

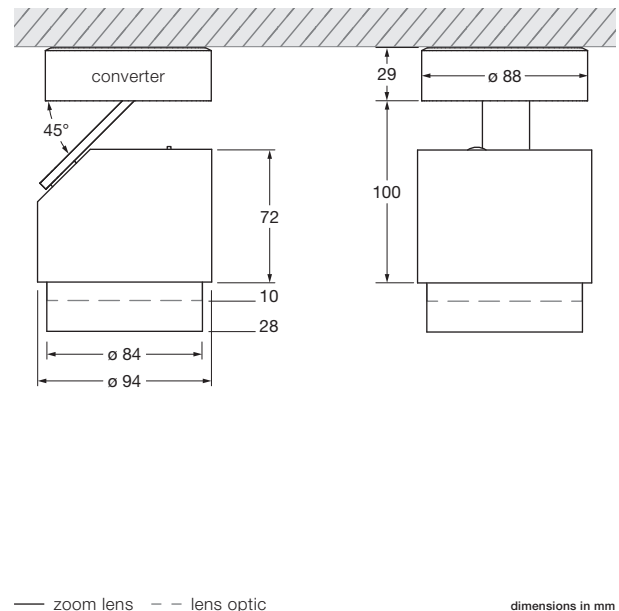

technical data lui pico up

properties	material	aluminium, steel chrome-plated, painted or anodised, plastic, glass, optical plastic		
	turning range body	360° (with stop)		
	turning range head	360°		
	weight	1.1 kg		
surface	head / base	shiny chrome, matt chrome, glossy white, matt white, matt black		
	optic	matt gold, rose gold, bronze, shiny chrome, matt chrome, matt white, matt black		
	body	shiny chrome, matt chrome, matt white, matt black		
Occhio LED	average life time	> 50.000 hrs		
	energy efficiency class	A++ / A+		
	power	18 W / 13 W**		
	color rendering index	perfect color; CRI Ra 97	high flux; CRI Ra 85	
	color temperature	2700 K, 3000 K	3000 K, 3500 K, 4000 K	
	recommended use	residential and commercial	commercial	
electricity	dimming	slider control at the back of the head or external with trailing edge phase-cut dimmer*		
	power supply unit	integrated operating voltage 230 V AC / 50 Hz		
	permitted operating conditions	max. 30°C for indoor use only		



* For a list of compatible dimmers, see www.occhio.de/dim_en ** version shiny chrome



lui pico up overview inserts

	zoom	C 80	C 60	S 80	S 60	S 40	S 30
lui head							
zoom optic							
lens optic							
small lens medium							
small lens high							
soft edge glass							
clear glass							
fresnel lens							
	zoom	80°, contour	60°, contour	80°, soft	60°, soft	40°, soft	30°, soft



lui pico up lighting effects

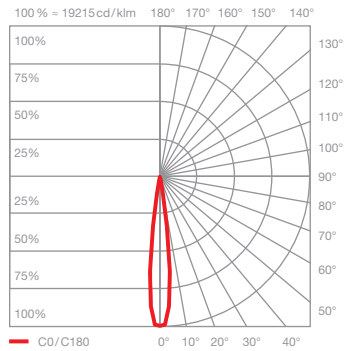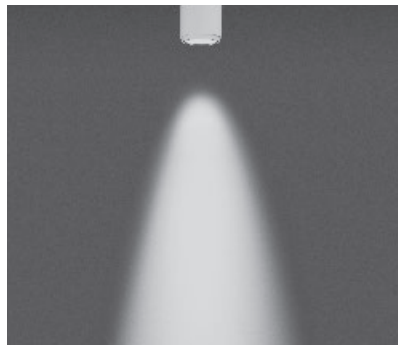

Z20 soft
directed light with soft contour beam angle
(approx. 20°)

inserts: zoom lens
soft edge glass



luminous flux:	perfect color	18 W	890 lm
	high flux	18 W	1190 lm
	perfect color	13 W	650 lm
	high flux	13 W	890 lm

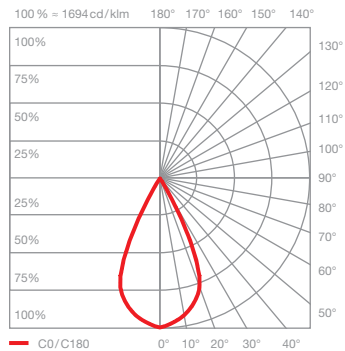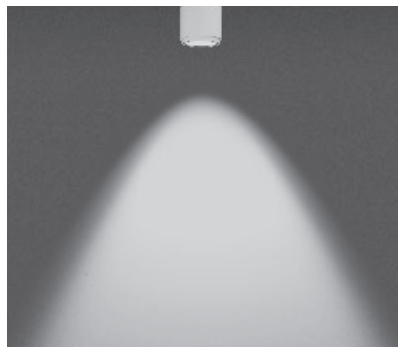

Z60 soft
directed light with soft contour beam angle
(approx. 60°)

inserts: zoom lens
soft edge glass



luminous flux:	perfect color	18 W	890 lm
	high flux	18 W	1190 lm
	perfect color	13 W	650 lm
	high flux	13 W	890 lm

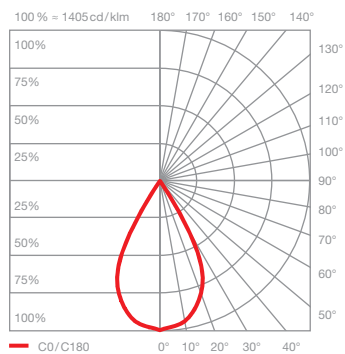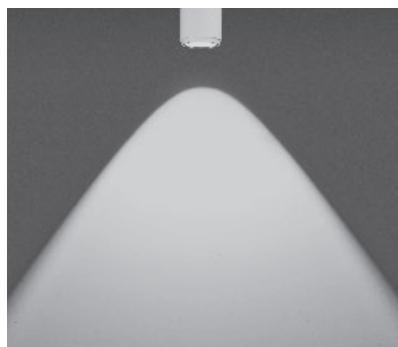

C80 contour
directed light with contour beam angle
(approx. 80°)

inserts: lens optic
small lens medium
clear glass

luminous flux:	perfect color	18 W	1010 lm
	high flux	18 W	1350 lm
	perfect color	13 W	740 lm
	high flux	13 W	1010 lm

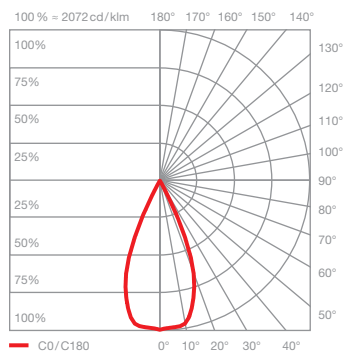
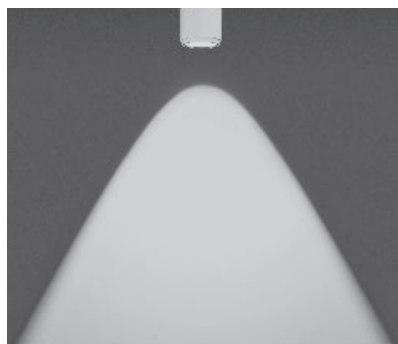


C60 contour
directed light with contour beam angle
(approx. 60°)

inserts: lens optic
small lens high
clear glass

luminous flux:	perfect color	18 W	1040 lm
	high flux	18 W	1390 lm
	perfect color	13 W	770 lm
	high flux	13 W	1040 lm

lui pico up lighting effects

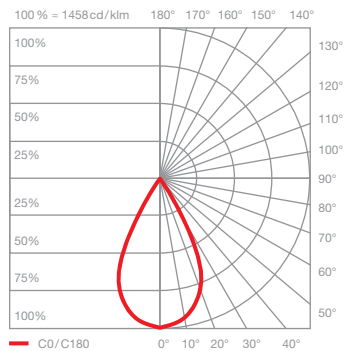
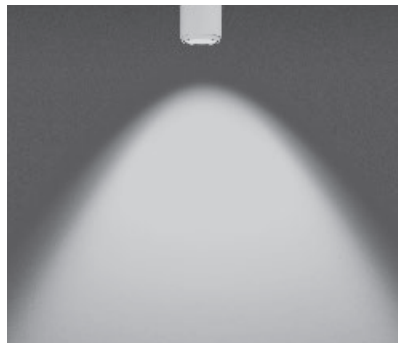


S80 soft

directed light with soft contour beam angle (approx. 80°)

inserts: lens optic
small lens medium
soft edge glass

luminous flux:	perfect color	18 W	1010 lm
	high flux	18 W	1340 lm
	perfect color	13 W	740 lm
	high flux	13 W	1010 lm

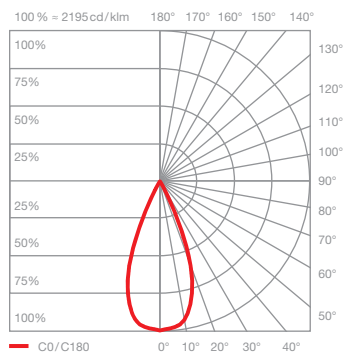
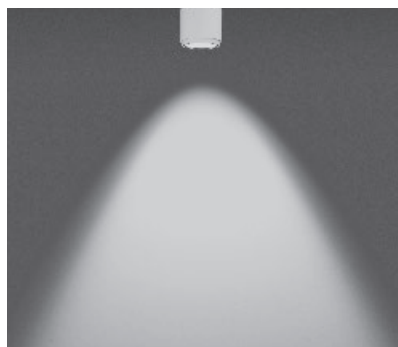


S60 soft

directed light with soft contour beam angle (approx. 60°)

inserts: lens optic
small lens high
soft edge glass

luminous flux:	perfect color	18 W	1010 lm
	high flux	18 W	1350 lm
	perfect color	13 W	740 lm
	high flux	13 W	1010 lm

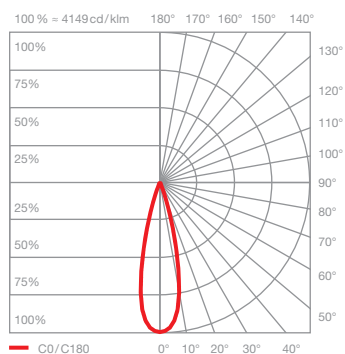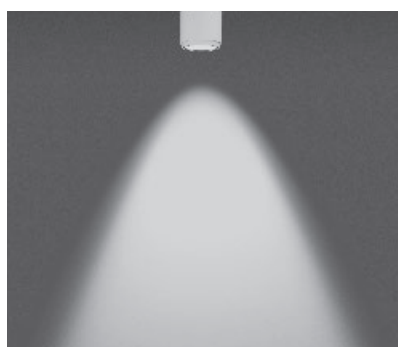


S40 soft

directed light with soft contour beam angle (approx. 40°)

inserts: lens optic
small lens medium
fresnel lens

luminous flux:	perfect color	18 W	910 lm
	high flux	18 W	1210 lm
	perfect color	13 W	660 lm
	high flux	13 W	910 lm

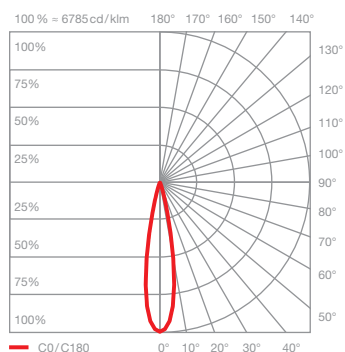

S30 soft

directed light with soft contour beam angle (approx. 30°)

inserts: lens optic
small lens high
fresnel lens

luminous flux:	perfect color	18 W	940 lm
	high flux	18 W	1250 lm
	perfect color	13 W	690 lm
	high flux	13 W	940 lm